



AL HAYA AL JAMEELA  
GROUP

---

Premium RESERVE Collection

---

**Luxury Vinyl Tiles**

---

*The essence of style..*





AL HAYA AL JAMEELA  
GROUP  
*The essence of style..*

# LVT FLOORING

INDEX	PAGE
RESERVE	3
HW80 & HW81	4
HW82 & HW83	5
HW84 & HW85	6
COLLECTIONS	7
TECHNICAL DATASHEETS	8



# Premium RESERVE Collection

## *Timeless Design, Lasting Performance*

Introducing the **Reserve Collection** – a premium selection of Luxury Vinyl Tiles (LVT) that blends the warmth of natural wood with the resilience of modern technology. Crafted for both residential and commercial spaces, this collection is designed to elevate interiors with style, durability, and ease of maintenance.

Each color in the **Reserve Collection** reflects rich, earthy tones and realistic textures, bringing sophistication and comfort underfoot. Whether you're designing a cozy home, a retail showroom, or a high-traffic office, Reserve offers the perfect balance of beauty and performance.

### **Key Features:**

- Waterproof & scratch-resistant
- Easy click-lock installation
- Realistic wood grain texture
- Low maintenance, high durability
- Suitable for homes, offices, retail spaces & more

Rediscover the beauty of wood—with the practicality of LVT.






Model	HW80
Size	183x1220x3.5mm
Collection	RESERVE
Wear layer	.3



Model	HW81
Size	183x1220x3.5mm
Collection	RESERVE
Wear layer	.3

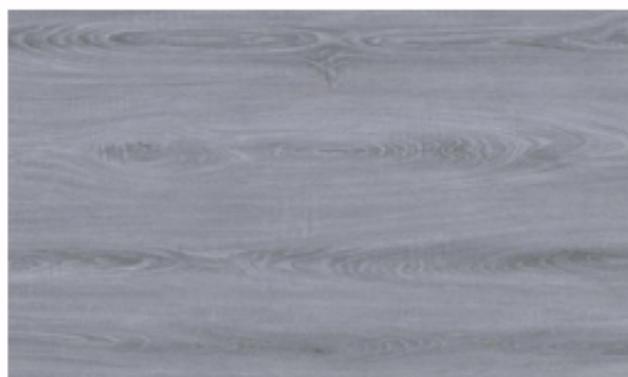


Model	HW82
Size	183x1220x3.5mm
Collection	RESERVE
Wear layer	.3



Model	HW83
Size	183x1220x3.5mm
Collection	RESERVE
Wear layer	.3



Model	HW84
Size	183x1220x3.5mm
Collection	RESERVE
Wear layer	.3

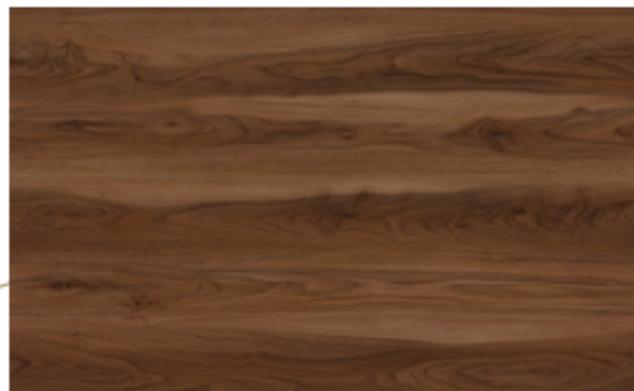

Model	HW85
Size	183x1220x3.5mm
Collection	RESERVE
Wear layer	.3



HW80



HW81



HW82



HW83



HW84



HW85

LVT CLICK 3.5 mm / 0.3 mm

Items	Methods	Requirements	Notes
Length	ISO 24342	±0.50mm	
Width	ISO 24342	±0.20mm	
Overall thickness	ISO 24346	+0.13mm, -0.10mm	
Squareness and straightness	ISO 24342	≤0.25mm	
Dimensional stability	ISO 23999	≤0.15%	
Curling after exposure to heat	ISO 23999	≤2mm	
Residual indentation	ISO 24343-1	≤0.10mm	
Color fastness to artificial light	ISO 105 B02	≥6	
Click accuracy	Internal	±0.10mm	
Profile locking strength	Internal	≥10kgf/50mm	
Effect to castor chair	ISO 4918	≥ 25000cycles	After 25000cycles, no delamination shall occur. No disturbance to the surface other than a slight change in appearance.
Gloss	Internal	±1.5	Use 60o Gloss meter. Gloss range is according to customers' requirements.
Chemical resistance	ISO 26987	Pass	
Heavy metals	R.oHS	Pass	
Phthalate	EN 14372	ND	
SVHC	REACH	Pass	
Fireclassification	EN 13501-1	Bf1-s1	

